



**TEST REPORT**  
**IEC TR 62778**

**Application of IEC 62471 for the assessment of blue light hazard to  
light sources and luminaires**

Report Reference No.....: EED31K002109

Compiled by (+ signature).....: Carrie Lin

*Carrie Lin*

Reviewed by (+ signature).....: Torres He

*Torres He*

Approved by (+ signature).....: Amo Liu

*Amo Liu*




**Summary of testing:**


**Test conditions:**

1. Ambient temperature: 24,8 ; Humidity: 53%;
2. Measurement distance: 200mm;
3. Aperture stop: 7mm

**Spectral Distribution**

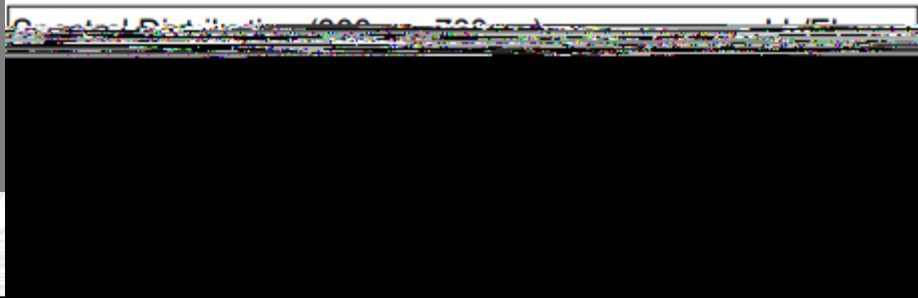

<b>Test item particulars..... :</b>	
Product evaluated..... :	<input checked="" type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire
Rated voltage (V)..... :	5,0V DC
Rated current (mA)..... :	60mA
Rated CCT (K)..... :	N/A
Rated Luminance (Mcd/m <sup>2</sup> )..... :	N/A
Component report data used .....	<input type="checkbox"/> Not applicable <input checked="" type="checkbox"/> LED package





IEC TR 62778			
Clause	Requirement + Test	Result - Remark	Verdict
<b>7</b>	<b>MEASUREMENT INFORMATION FLOW</b>		P
<b>7.1</b>	<b>Basic flow</b>		N/A
	'Law of conservation of luminance' applied		N/A
	Use of only true luminance/radiance values		N/A
	In case of luminaire: The light source is operated in the luminaire under similar conditions as when tested as a component		N/A
	In case $E_{thr}$ value for RG2 was established the peak value was derived from angular light distribution		N/A
<b>7.2</b>	<b>Conditions for the radiance measurement</b>		P



Photo Document

