



SPECIFICATION





1. Description


1.1 General Description






1.2 Features




1.3 Application



1.4 Package Dimension

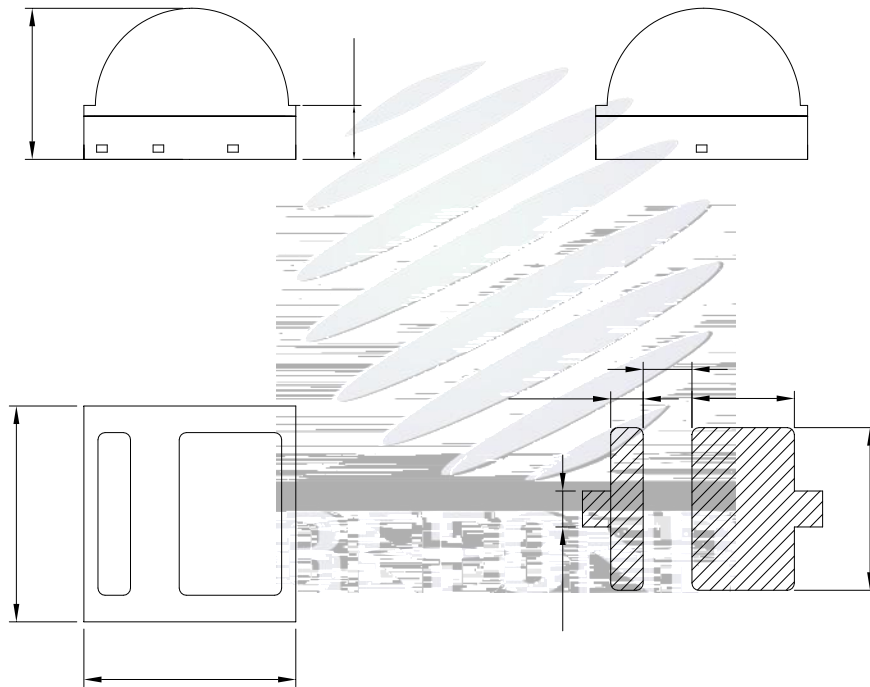



±






1.5 Product Parameters




	λ					

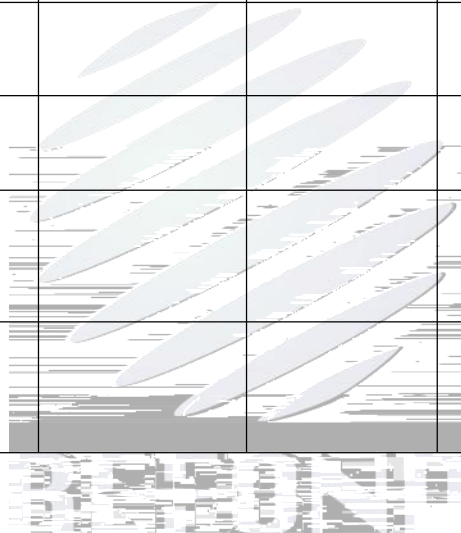




1.6 Typical optical characteristics curves

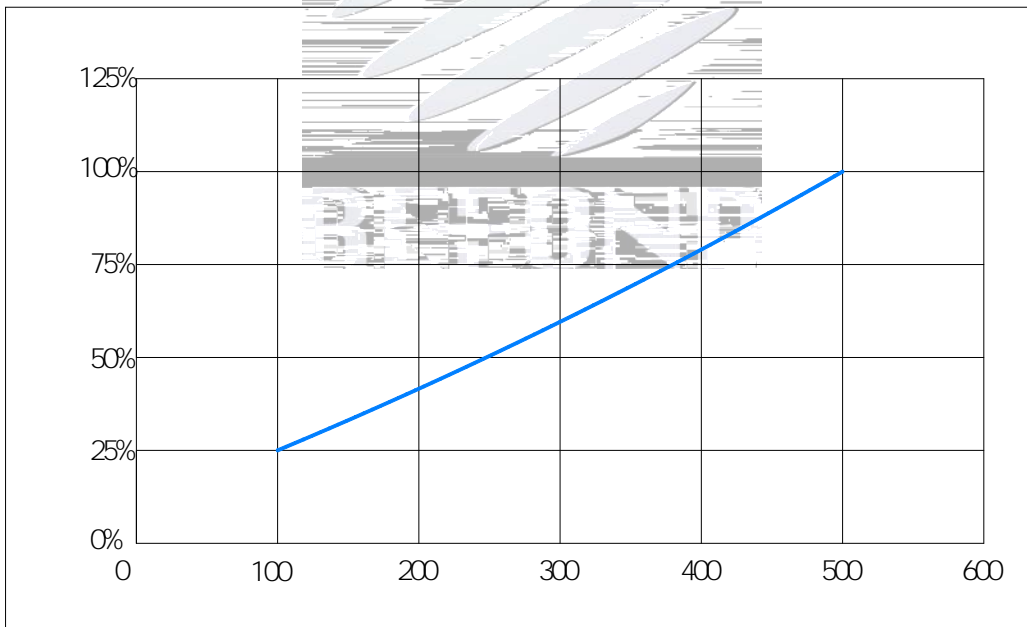
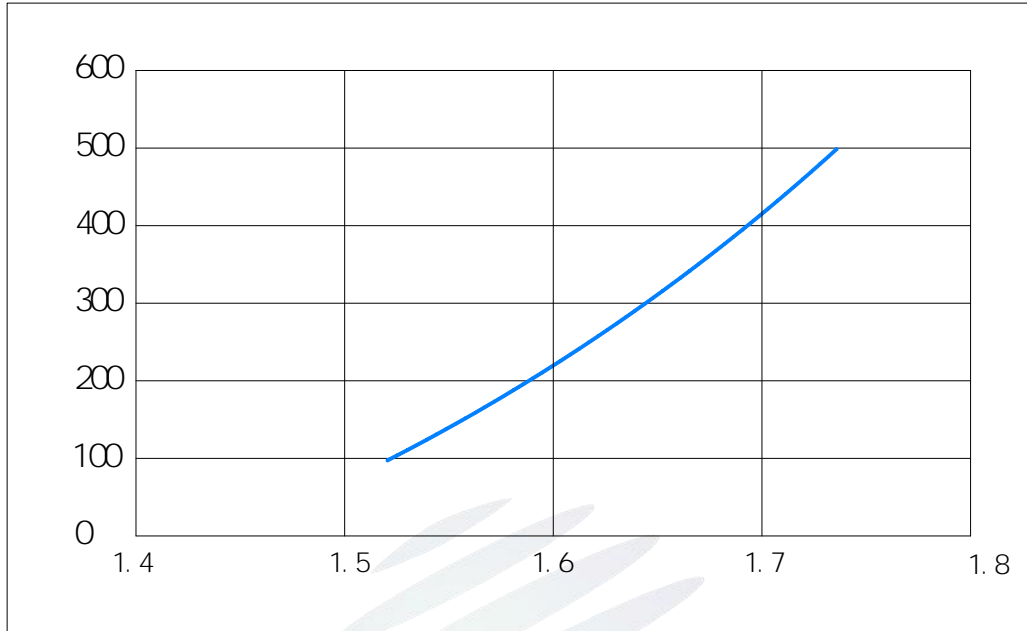


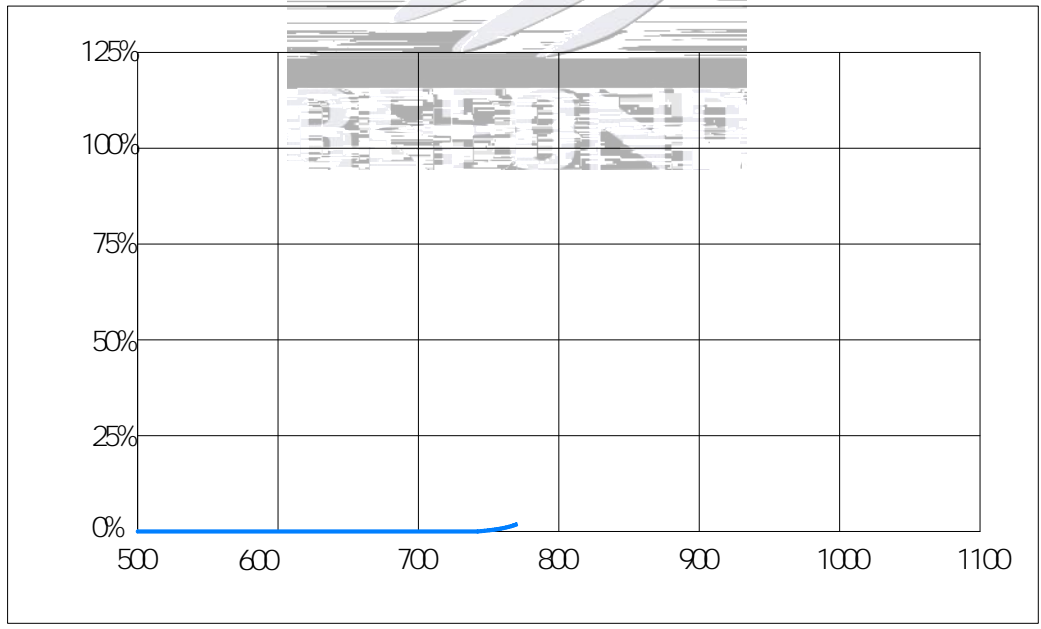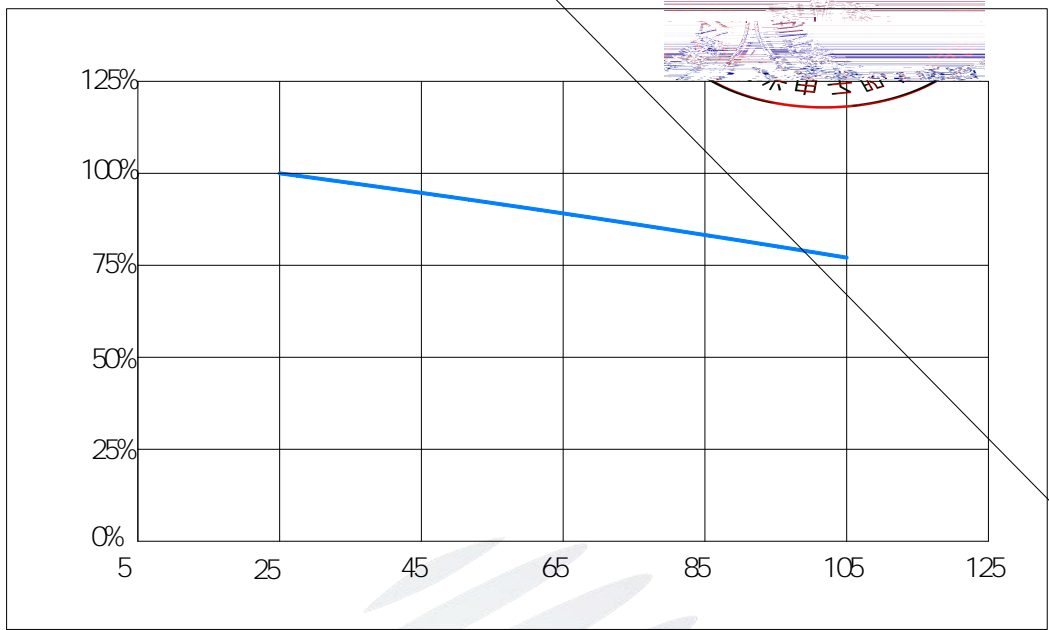





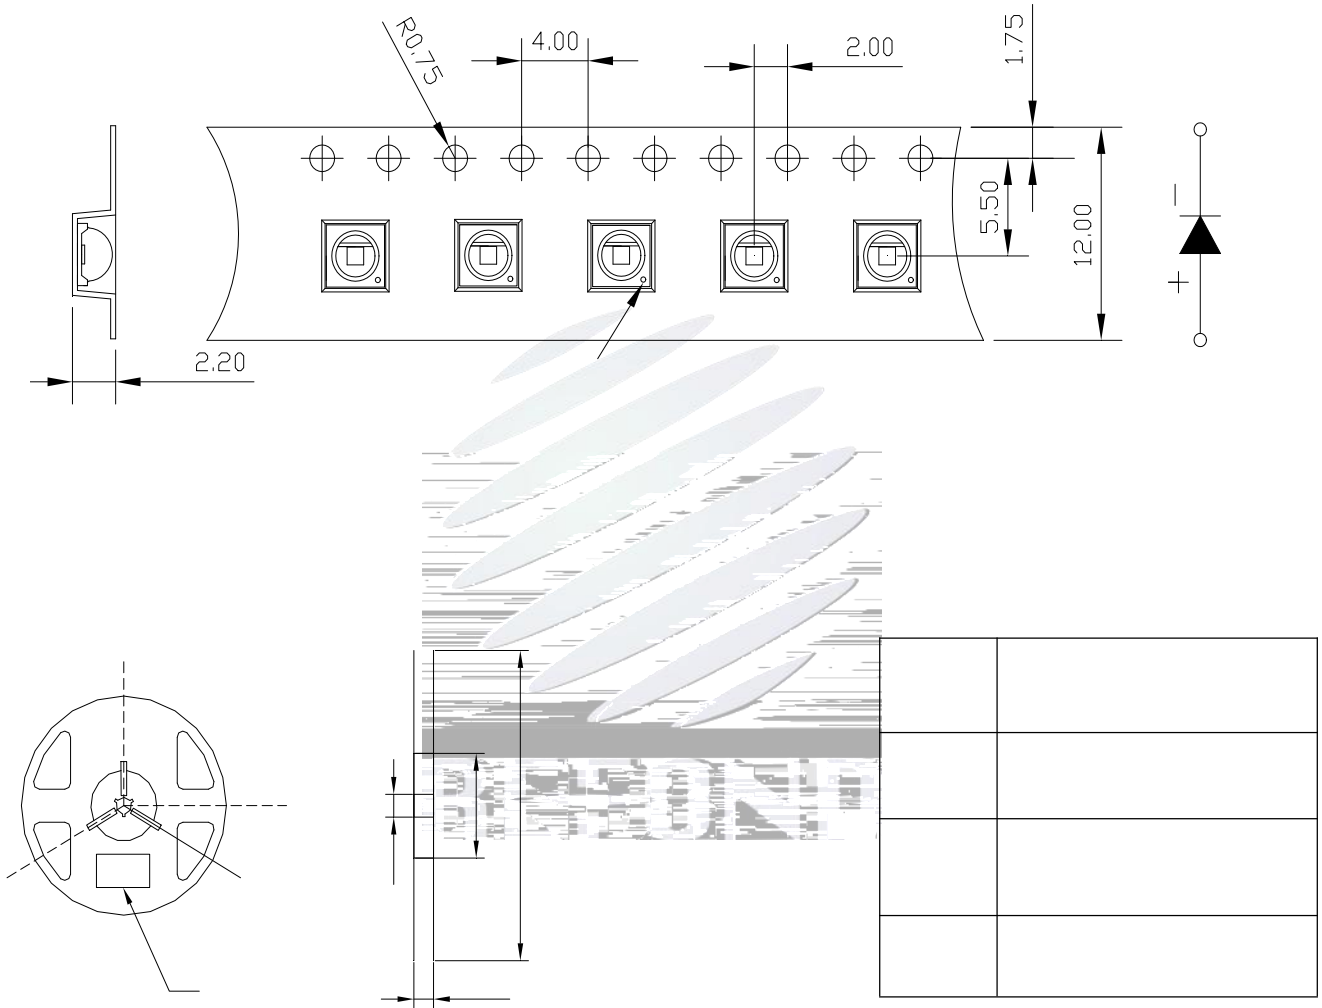

2. Packaging



2.1 Packaging Specification




PART NO. 
SPEC NO. 
LOT NO. 

BIN CODE
e WLP
VF


QTY:
DATE:

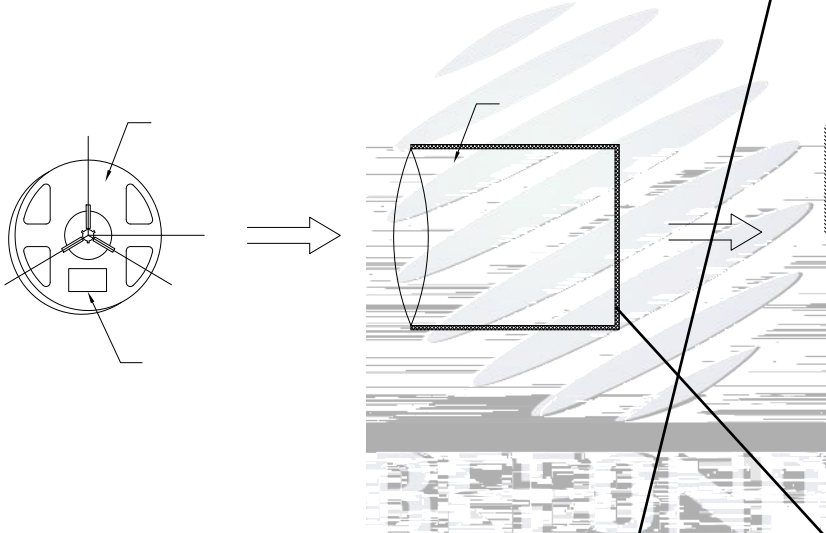


2.4 Reliability Test Items And Conditions




2.5 Criteria For Judging Damage

1.




3. SMT Reflow Soldering Instructions



3.1 SMT Reflow Soldering Instructions




°C




4. Handling Precautions

4.1 Handling Precautions

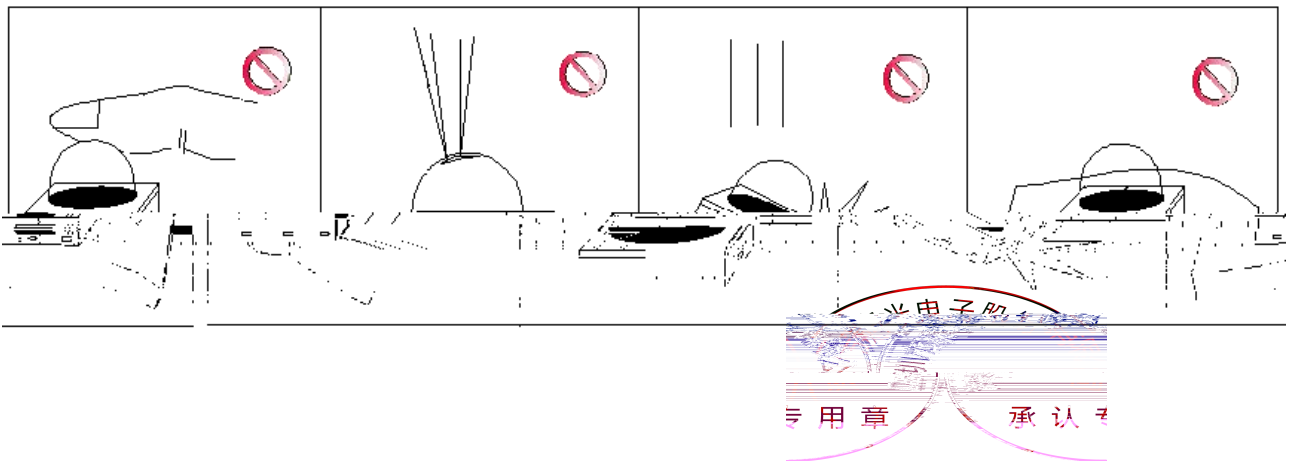



		士		



(7) () (±) °C

