


# SPECIFICATION



..... 3

General Description ..... 3

..... 3

..... 3

..... 4

..... 5

..... 7

..... 8

..... 11

..... 11

..... 12

..... 13



..... 14

..... 15

..... 15

..... 17

..... 17

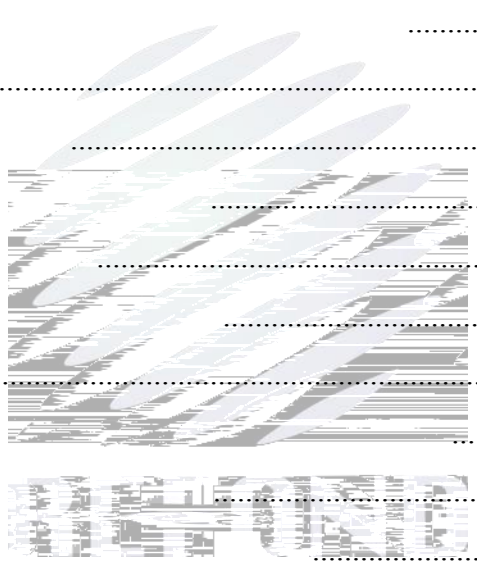


## 1. Description




### 1.1

### 1.2 Features


### 1.3 Application



### 1.4 Package Dimension

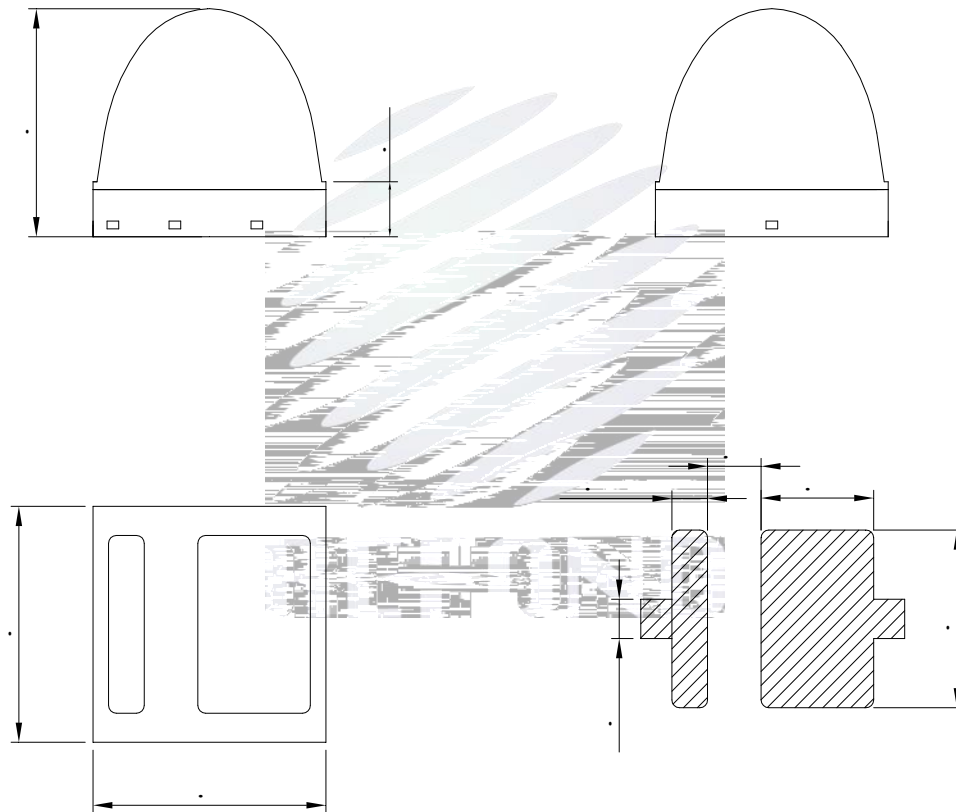

±








### 1.6 Bin Range Of Forward Voltage and Luminous Flux (IF=350mA)

BIN (IF=350mA)


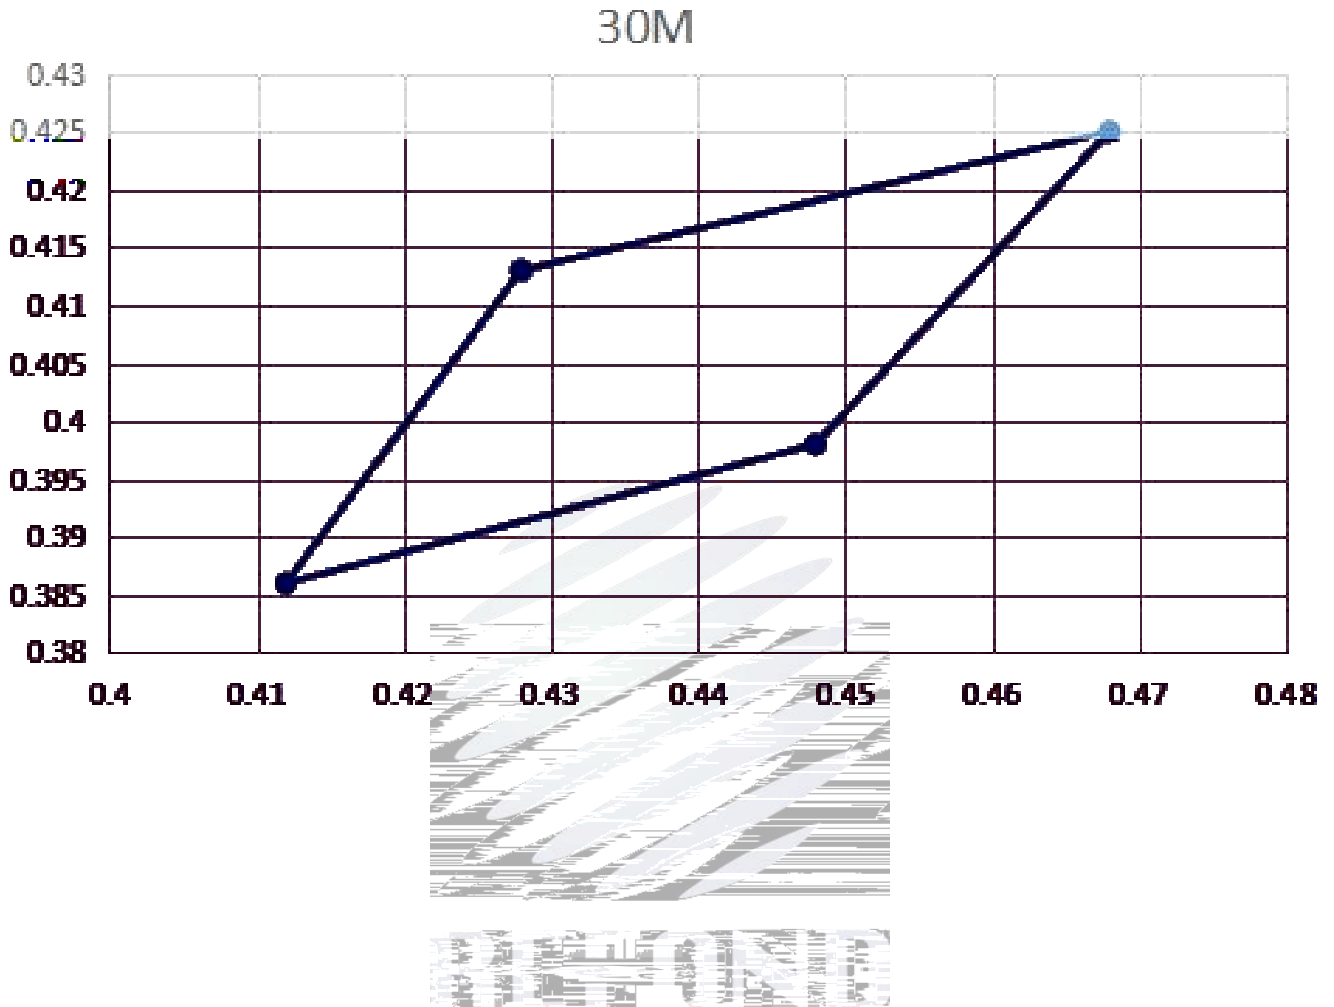


### Bin data

Bin Code	X1	Y1	X2	Y2	X3	Y3	X4	Y4
30M	0.468	0.425	0.428	0.413	0.412	0.386	0.448	0.398





兴由子助  
专用章 承认




## 1.7 Typical Optical Characteristics Curves

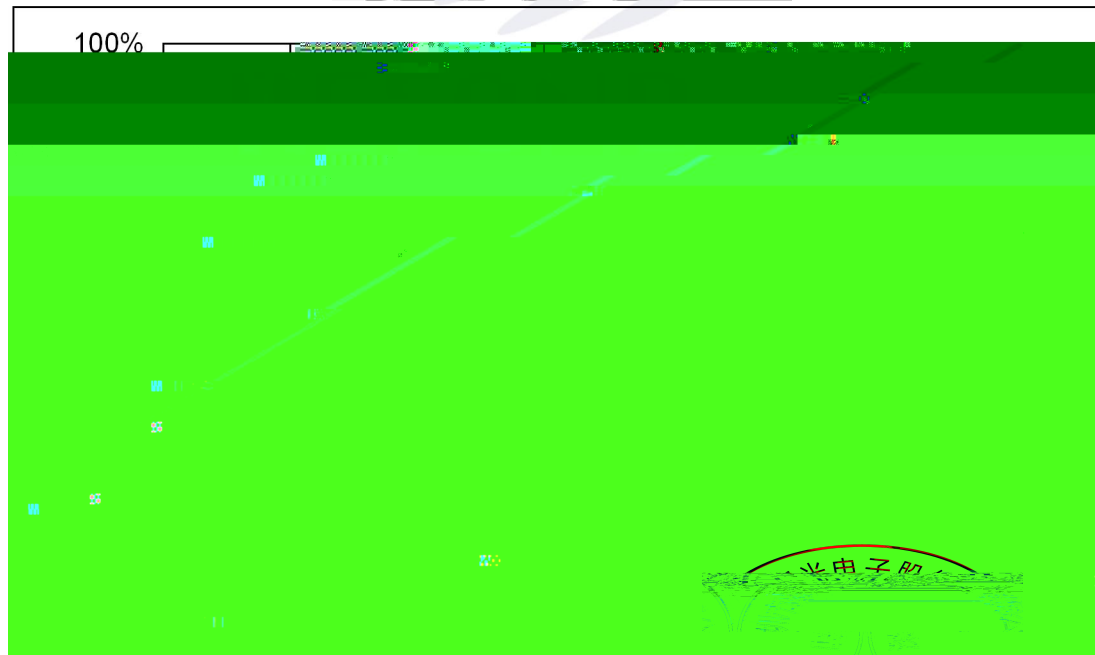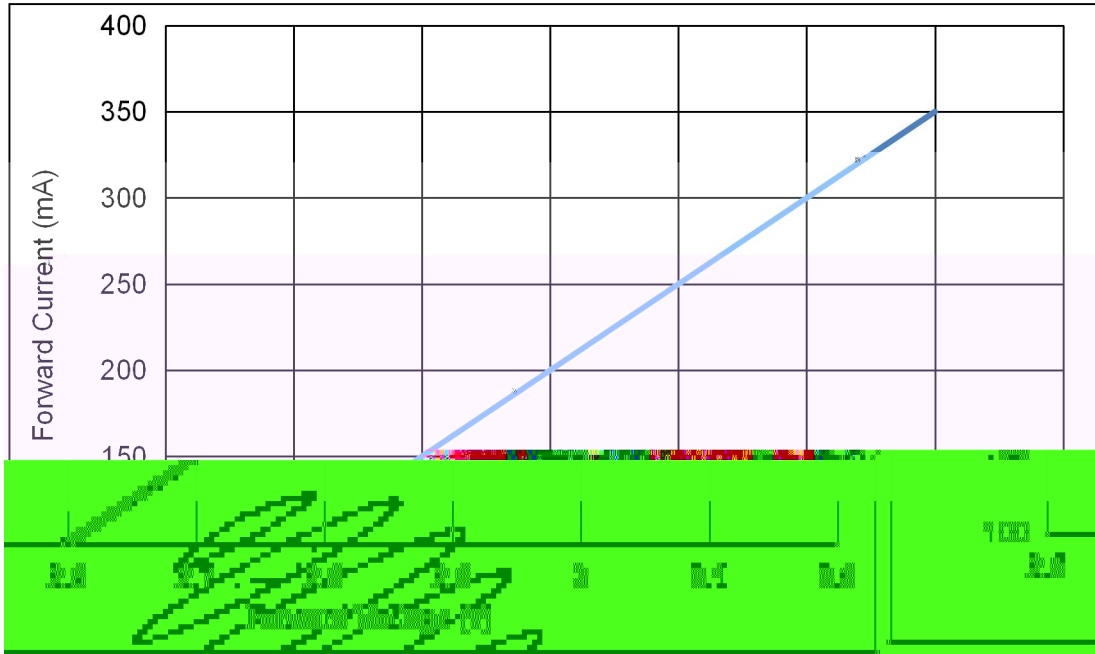

兴电子助  
专用章 承认



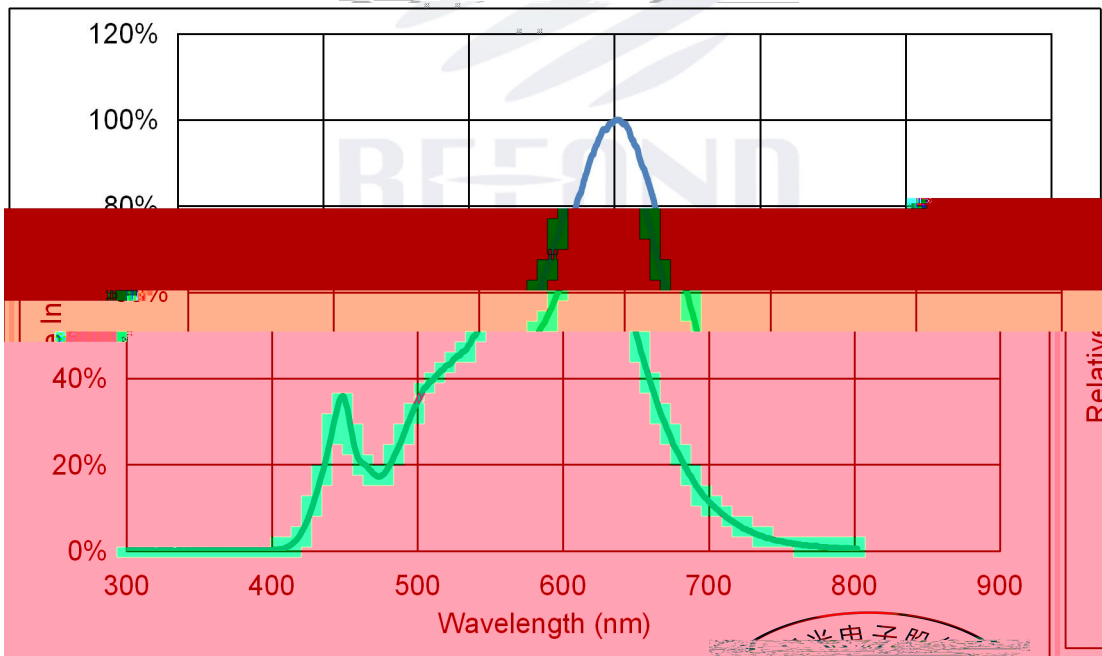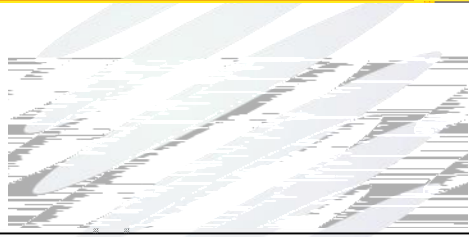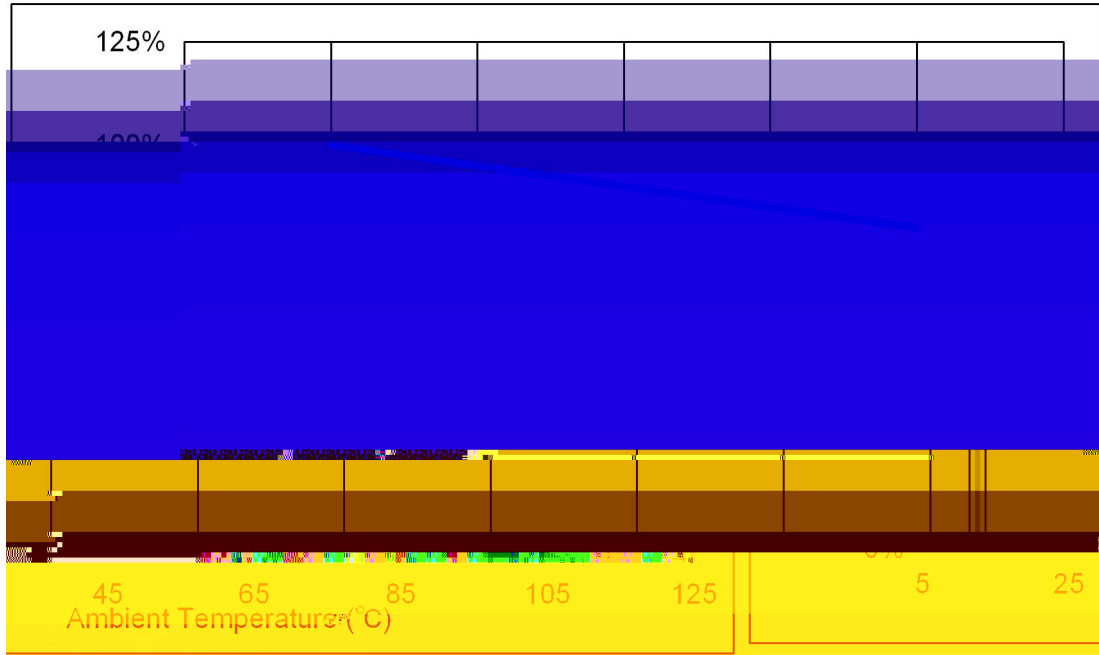

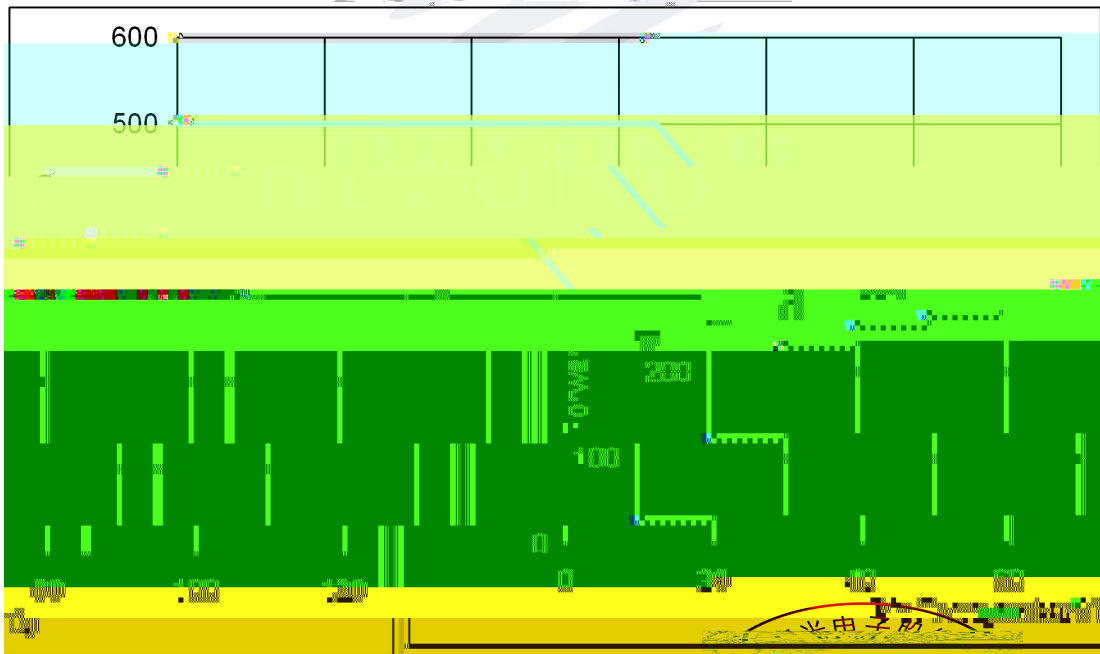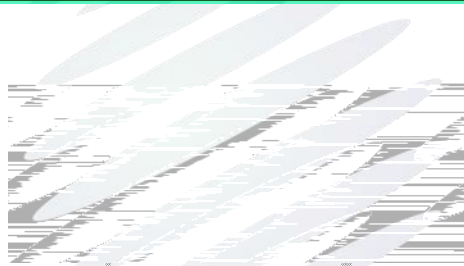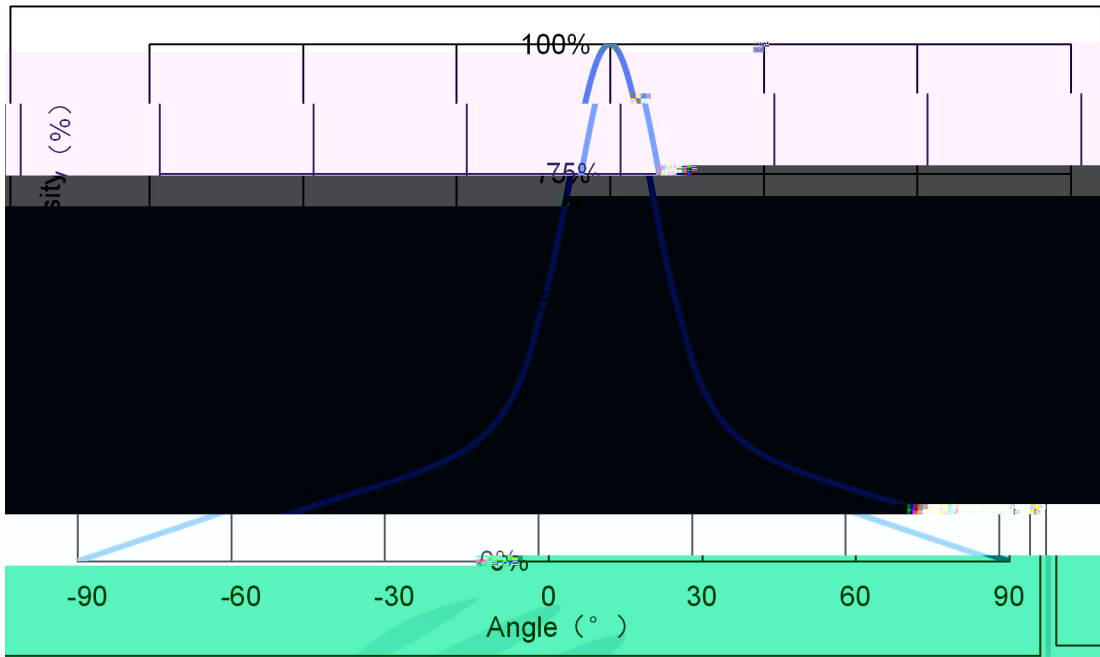


专用章

承认


## 2. Packaging

### 2.1 Packaging Specification

2500

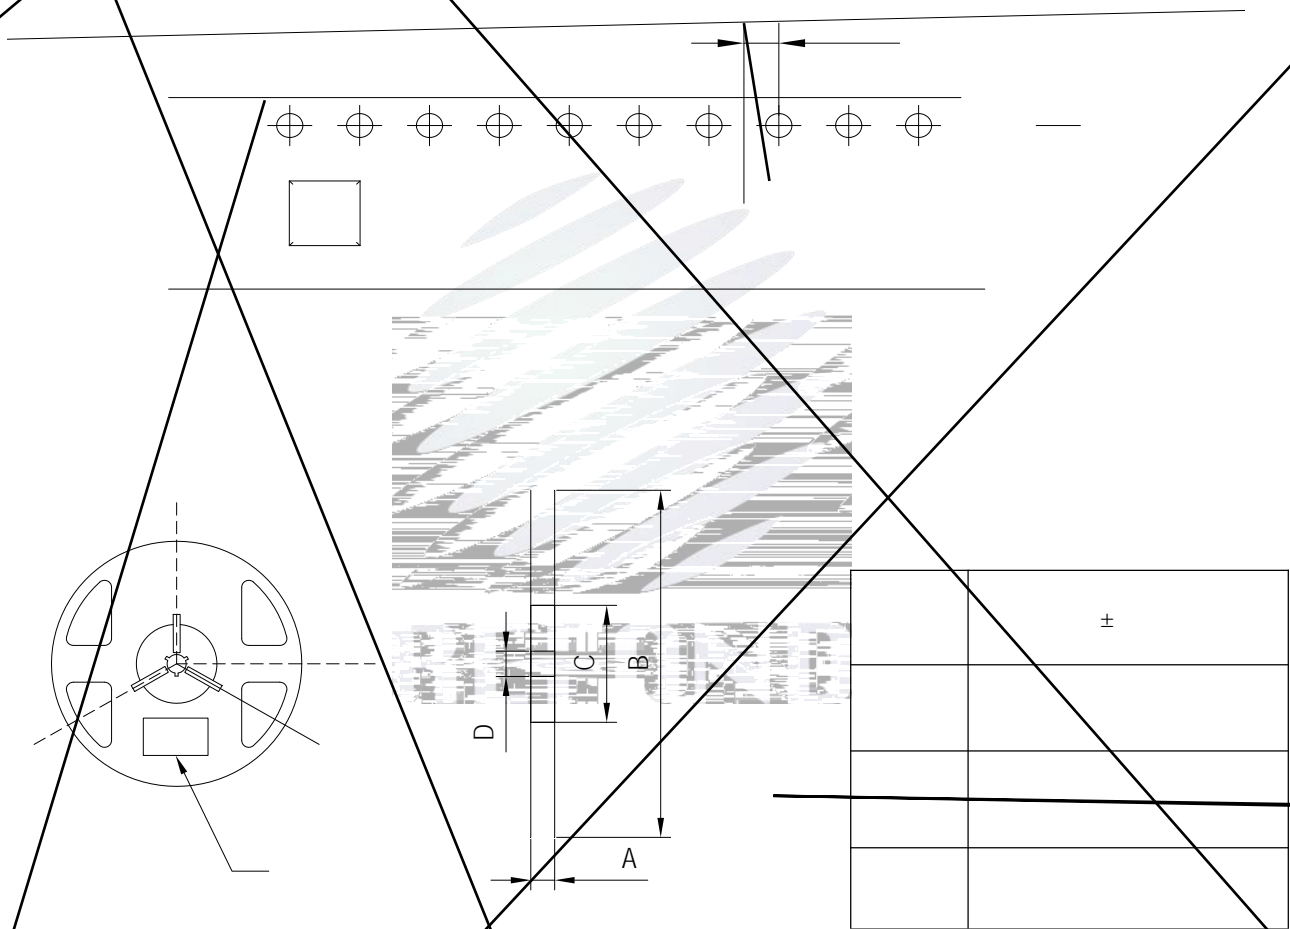

	±



---

---

---


---

---


---

---


---

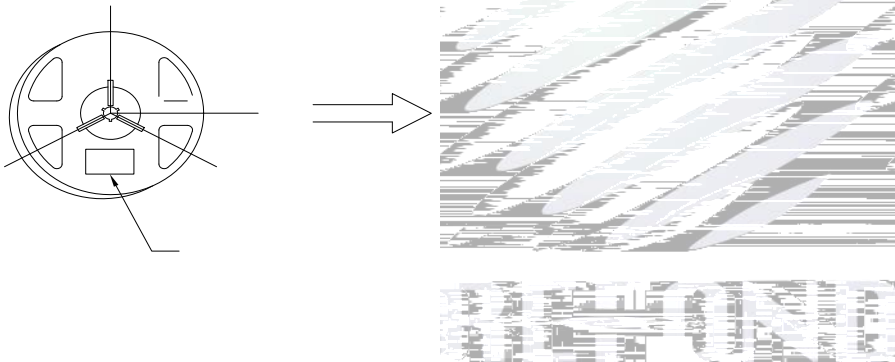

## 2.4 Reliability Test Items And Conditions

## 2.5 Criteria For Judging Damage



Luminous Flux				






°C

(2)



(1)





## 4. Handling Precautions

### 4.1 Handling Precautions

